

User Manual

STOLTZEN

Stoltzen SHE400K

4K HDMI Extender w/IR &RS232



All Rights Reserved

Version: SHE400_2020V1.0

Statement

Read this user manual carefully before using the product. Pictures shown in this manual is for reference only. Different models and specifications are subject to real product.

This manual is only for operation instruction only. The functions described in this version are updated till October, 2020. In the constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation. Please refer to the dealers for the latest details.

Safety Precaution

To ensure the best from the product, please read all instructions carefully before using the device. Save this manual for further reference.

- Follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- Do not dismantle the housing or modify the module to avoid electrical shock or burn.
- Using supplies or parts not meeting the products' specifications may cause damage, deterioration or malfunction.
- Do not expose the unit to rain, moisture or install this product near water.
- Install the device in a place with fine ventilation.
- Do not twist or pull by force ends of the CAT5e/CAT6a cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.
- Unplug the power cord when left unused for a long period of time.
- Refer all servicing to qualified service personnel.

Customer Service

We provide limited warranty for the product within three years.

For more details, please contact your distributor.

Introduction

This SHE400 is an HDBaseT Extender set consist of transmitter (TX) and receiver (RX). It distributes HDMI signal via CAT5e/CAT6a cable at 70m/PoC, and enables IR and RS232 pass-through to control local source device from remote or far-end display.


Features

- Supports HDMI1.4 & HDCP2.2.
- Maximum transmission distance is up to 40m for 4Kx2K, and 70m for 1080p.
- Supports bi-directional 5V IR and RS232 pass-through for long-distance control.
- Supports bi-directional PoC for simplified wiring.
- Supports CEC.
- Features DIP switcher for choosing Control or Update mode.

Package List

● 1 x Transmitter (TX)	● 1 x Receiver (RX)
● 2 x TX Mounting Ears with 2 Screws	● 2 x RX Mounting Ears with 2 Screws
● 4 x TX Plastic Cushions	● 4 x RX Plastic Cushions
● 1 x Power Adaptor (12VDC, 1A)	● 1 x User Manual

Panel Description

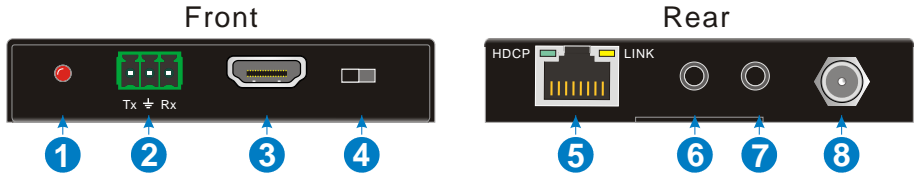

No.	Name	Description
①	Power LED	Illuminates red when power is applied.
②	RS232	Euroblock/Phoenix connector for connecting an RS232 data device.
③	HDMI IN (TX)	HDMI port for connecting the video source device (e.g. Blu-ray DVD)
	HDMI OUT (RX)	HDMI port for connecting the video display.
④	CTRL/UPDATE	Switch for determining the behavior of the RS232 connection. When in the CTRL position, it serves as an RS232 serial extender. When in the UPDATE position, it allows you to update the Valens IC program by connecting to a PC and running the batch file.
⑤	HDBT OUT (TX)	RJ45 jack for connecting the Cat5e/6 cable to the Receiver.
	HDBT IN (RX)	RJ45 jack for connecting the Cat5e/6 cable to the Transmitter.
⑥	IR IN	3.5mm jack for connecting an IR Receiver (not included).
⑦	IR OUT	3.5mm jack for connecting an IR Emitter (not included).
⑧	DC 12V	DC barrel connector for connecting the included AC power adaptor.


Stoltzen SHE400 4K HDMI Extender w/IR &RS232

Specification

Model Spec	SHE400T	SHE400R
Input	HDMI IN	HDBT IN
Output	HDBT OUT	HDMI OUT
Control	IR IN, IR OUT, RS232	IR IN, IR OUT, RS232
General		
Maximum Video Resolution	4Kx2K@60Hz 4:2:0, including 1080p@60Hz	
Transmission Mode	HDBaseT	
Transmission Distance	1080p signal to 70m, 4K signal to 40m	
Bandwidth	10.2Gbps	
Video Standard	HDMI1.4 with HDCP2.2	
Power Consumption	10 watts	
Operating Temperature	0 ~ +40°C	
Storage Temperature	-10 ~ +55°C	
Operating Humidity	0% ~ 90%	
Power Supply	Input Power: 12VDC 1A or Power over Cable (PoC); AC Adaptor Input Power: 100~240VAC, 50/60Hz	
Dimension (W*H*D)	106mm x 16mm x 84mm	
Net Weight (g)	250g	

Stoltzen SHE400 4K HDMI Extender w/IR &RS232

System Diagram

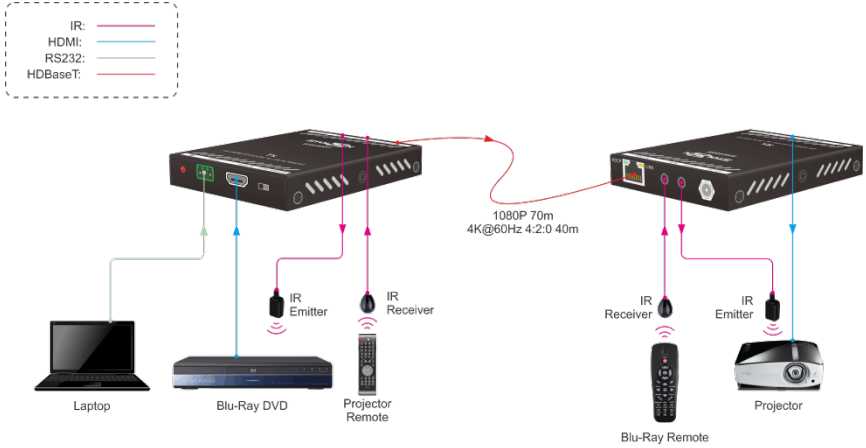

Note: This picture is for reference only, the specific scheme is subject to real devices.